

Maintenance and diagnostic functions to prevent unexpected downtime

FANUC

ZDT



ZERO DOWNTIME

Robot Maintenance and Diagnostic functions using IoT technology

ZDT (Zero Down Time) is a proven IoT solution designed to eliminate unexpected downtime on the factory floor. ZDT uses "Mechanical Health", "Process Health", "System Health" and "Maintenance Health" to eliminate downtime.



Mechanical Health
Abnormalities for mechanical parts, such as reducers, are detected and notified several weeks before actual failure. Therefore, maintenance can be better planned.

Central Data Management
Robot status can be monitored anywhere using a web browser on a PC or smart device. Advance notification is provided by email when an abnormality is detected.

Maintenance Health
Optimal maintenance is achieved by analyzing the life of consumable components based on actual robot operating conditions.

Process Health
It is possible to collect and visualize machine process data and achieve early detection of equipment abnormalities.

System Health
More appropriate actions are performed by knowing the information and status required for maintenance, such as robot status and operational histories.

Realizing 0 (Zero) Down Time

Advance notifications issued before failures prevent unexpected downtime.



ZDT Benefits
A single robot breakdown can cause significant system production downtime. ZDT includes analytics that can detect robot abnormalities and provide advance notification that action is required so maintenance can be performed to prevent unexpected downtime.

Installed base
Over 40,000 robots connected to ZDT
ZDT has prevented over **2,000 cases of robot downtime**

*2024 October results

ZERO DOWN TIME


Predictive analytics and functions to detect abnormalities allow maintenance to be performed before failure occurs, which means zero down time.




Central Data Management

Centralized robot data management. Robots can be monitored anytime, anywhere with a PC or smart device.

PC

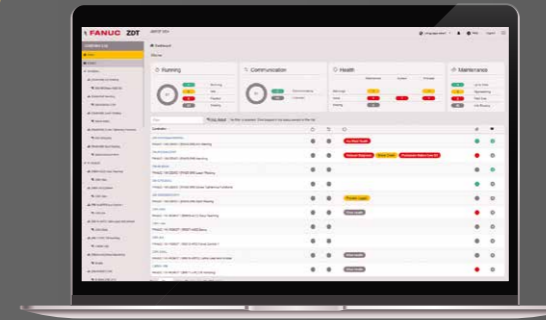

Smart device

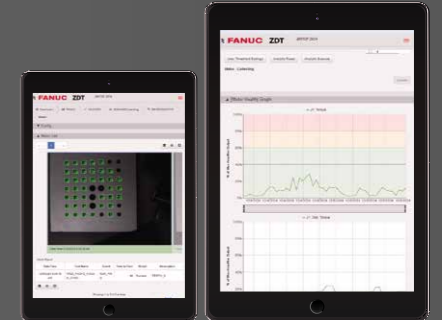

» Maintenance and Diagnosis Functions of ZDT




Mechanical Health

Predict failure

Reducer Diagnosis

This function diagnoses the deterioration of the reducer on each axis. A notification will be sent when the degradation exceeds the threshold, so robot failure can be predicted in advance.



Other Functions

- Motor Torque Analysis
- Servo Off Alarm Log

Benefits

- Predict abnormalities weeks in advance
- Schedule inspections and repairs during planned production stoppages
- Prevent unexpected downtime





Process Health

Prevent product defects

Servo Gun Diagnosis

This function diagnoses servo gun abnormalities. A notification is sent when the disturbance torque exceeds the threshold, so downtime due to servo gun failure can be prevented.

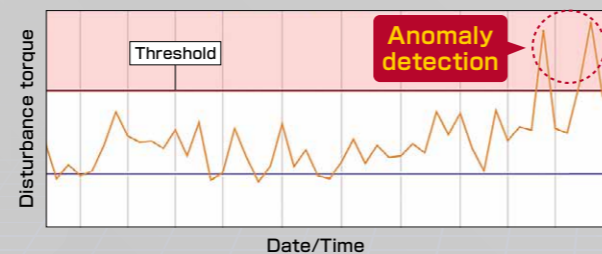

Other Functions

- Spot Weld Log
- Arc Welding Condition Diagnosis

Benefits

- Detect machining abnormalities
- Early detection of process quality issues due to improper welding
- Prevent unexpected downtime due to process equipment abnormalities




System Health

Make efficient operation

Controller Memory Status

This function calculates and displays a summary of the free memory space on the controller. It sends a notification if free memory goes below a pre-determined threshold, preventing unexpected downtime due to lack of memory.

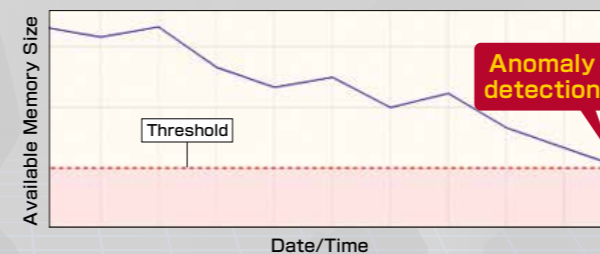

Other Functions

- Program Change Log
- Alarm Log

Benefits

- Check controller memory status
- Improve operating rate of robot
- Use Operation Log or Alarm Log to diagnose issues




Maintenance Health

Optimize maintenance

Maintenance Reminder

This function tracks the status of recommended robot maintenance items and optimal replacement time for consumables. In addition to optimizing maintenance costs, component life is extended through proper maintenance timing.

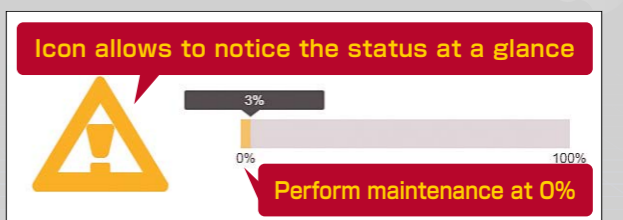

Other Functions


- Grease Change Notifications
- Cable Change Notifications

Benefits


- Make a reliable maintenance plan
- Extend robot life
- Reduce maintenance costs

Select From 2 ZDT Types

ZDT(On-Premise)

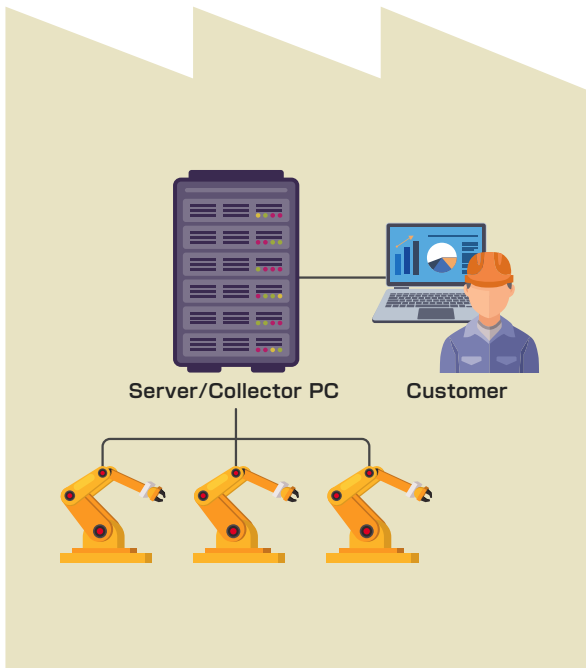

ZDT(Cloud)

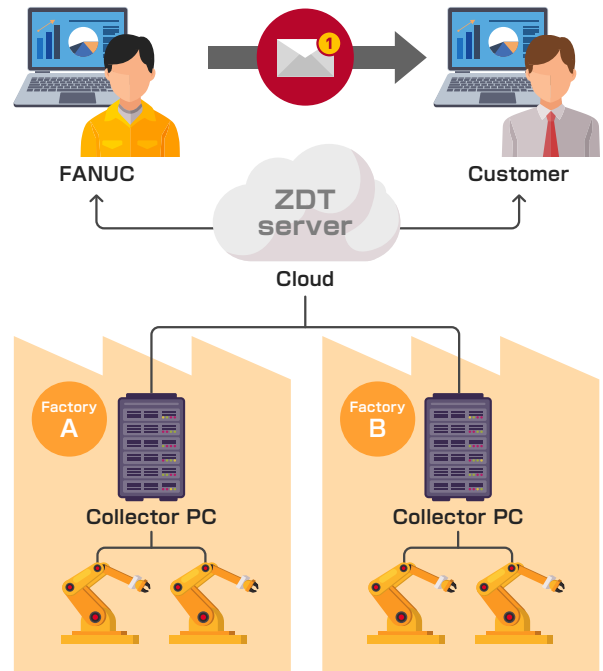

Platform	ZDT	
	On-Premise	Cloud
Data storage location	Inside factory	Outside factory
Diagnosis	Yes	Yes
Analysis by FANUC service personnel	No	Yes
Features	No connection to external networks	Access across many factories
Devices	Server/Collector PC	Collector PC
CPU	Intel® Xeon® 16-core or more	Intel® Core™ i7 6-core or more
Memory	64GB or more	8GB or more
Storage	5.0TB (RAID5 Configuration)	60GB or more

*Required specifications depend on the number of robots connected and functions used.

*Robot data stored on a ZDT Server can be viewed with a web browser. Supported browsers are Google Chrome and Microsoft Edge.

*An internet connection is required if using ZDT Cloud.

FANUC CORPORATION

•Headquarters 3580, Shibokusa, Oshino-mura, Minamitsuru-gun
Yamanashi, 401-0597, JAPAN
Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

•Overseas Affiliated Companies

FANUC America Corporation
FANUC Europe Corporation, S.A.
SHANGHAI-FANUC Robotics CO., LTD.
KOREA FANUC CORPORATION
TAIWAN FANUC CORPORATION
FANUC INDIA PRIVATE LIMITED
FANUC SINGAPORE PTE. LTD.
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
PT. FANUC INDONESIA
FANUC OCEANIA PTY. LIMITED
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

Phone: (+1)248-377-7000
Phone: (+352)727777-1
Phone: (+86)21-5032-7700
Phone: (+82)55-278-1200
Phone: (+886)4-2359-0522
Phone: (+91)80-2852-0057
Phone: (+65)6567-8566
Phone: (+66)2-714-6111
Phone: (+60)3-3082-1222
Phone: (+62)21-4584-7285
Phone: (+61)2-8822-4600
Phone: (+27)11-392-3610

<https://www.fanucamerica.com/>
<https://www.fanuc.eu/>
<https://www.shanghai-fanuc.com.cn/>
<https://www.fkc.co.kr/>
<https://www.fanuctaiwan.com.tw/>
<https://www.fanucindia.com/>
<https://www.fanuc.com/fsp/>
<https://www.fanuc.com/fth/>
<https://www.fanuc.com/fmm/>
<https://www.fanuc.com/fin/>
<https://www.fanucoceania.com.au/>
<https://fanuc.co.za/>

- All specifications are subject to change without notice.
- No part of this catalog may be reproduced in any form.
- The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 2019
ZDT(E)-04, 2025.1, Printed in Japan